

CF Player® CDDA Plus

The CF Player® CDDA Plus is a audio playback device for the rough everyday use with an integrated media control unit. Professional technology by the manufacturer of high-quality broadcasting equipment.

Made in Germany

Fields of Application


- Museums
- Exhibitions
- Acoustic irradiation
- Announcements
- Acoustic guides
- Fairs
- Voice output
- Voice operating guide

The robust device works without any moving parts. Audio tracks are stored on CompactFlash memory cards. These cards are absolutely free from wear and can be rewritten almost unlimited.


The integrated clock with calendar function controls the playback



"Aschenbrödels Küche"
CF Player® in the "Märchenland"

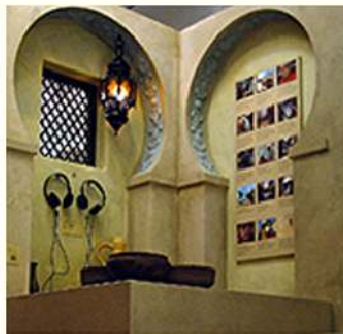

"Zu Hause beim kleinen Muck"
(Pictures: Filmmuseum Potsdam)

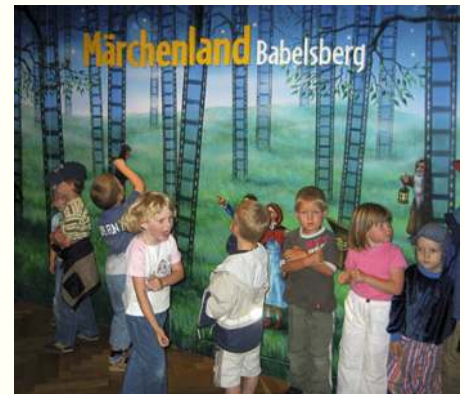

CF Player® CDDA Plus

Features

- automatic playback of all audio tracks in endless loop
- order controlled by an ordinary playlist
- scheduled with internal clock time and calendar
- audio tracks can be started directly by keyboard
- Clips can be started directly by digital inputs (RS232 Digital I/O Adapter)
- the CF Player® CDDA Plus can be controlled by SMS text messages received from a connected GSM modem
- the CF Player® CDDA Plus can be controlled by its geographic position - longitude and latitude - provided by a connected GPS receiver if installed in vehicles, ships, airplanes etc.
- very convenient and safe configuration by using setup scripts onto CF-Card
- remote control of volume in steps of 1dB
- Hot swapping:
CF-Card can be replaced while it is operating. No need to switch off the device allows very convenient, smooth and safe handling.

Scope of delivery

- CF Player® CDDA Plus, Power-Supply
- CD incl. manual and software "CFPCConvert" for PC

Specifications

- **Formats:**
CDDA digital Audio, 44,1kHz sample rate, 16Bit Stereo
- **Storage Medium:**
CompactFlash MemoryCard all capacities (16MB to > 4GB), Filesystem FAT (FAT16 and FAT32)
- **Event Input:**
RS232 RJ45 8pins for commands, keyboards, GSM and GPS receiver etc.
- **Output:**
Stereo Audio (L/R) at 2 cinch (RCA)
- **Power:**
8V to 35V DC Wide-Range Power-Supply input, 3W including CompactFlash Card, external Power-Supply e.g. 12V/300mA
- **Operating temperature:** -10 to +60 °C
- **Dimensions:** 119mm / 131mm / 28mm (length / width / height)
- **Weight (net):** 400g, metal case

No. 4346.0003.01

Accessories

- CompactFlash memory cards approved for video streaming
- "CFPMan" management system (PC) to create presentation projects in an easy and comfortable way
- several keyboards for interactive control
- RS232 Cable to connect a PC etc.
- Digital I/O adapter in order to connect push buttons, light barriers, motion detectors etc.
- GSM modem to control the playback and to update the news ticker by SMS messages (sent by mobile phone e.g.).
- GPS receiver to control the playback of clips by the geographic position of the device in vehicles, ships, airplanes etc.

© SZe All rights reserved. All information is subject to change without notice. Pictures for illustration only.